


# DR700™ RETROFIT

## Overview


Lumen Rating 720lm  
Wattage 10W  
Beam Angle 60° WFL  
Light Type High-Brightness LED Directional Light




## Product Dimensions




FRONT VIEW

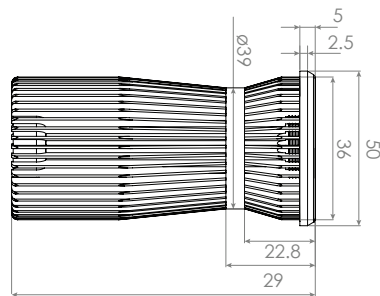

SIDE VIEW

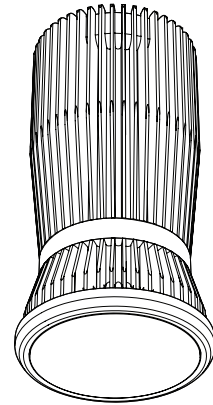


## Product Life

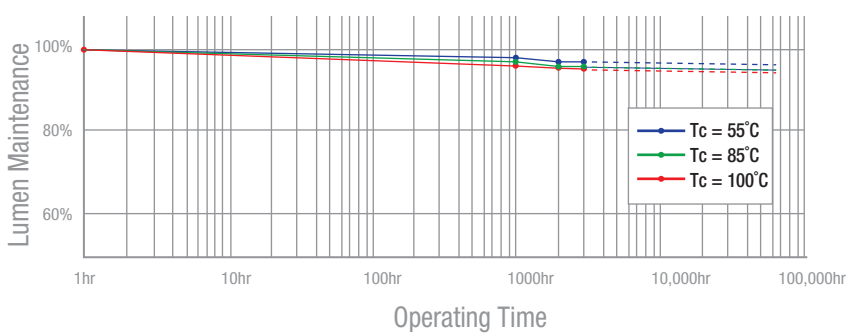


## Photometrics

DR700 60°  
POLAR CANDELA DISTRIBUTION  
(720lm 3000K)

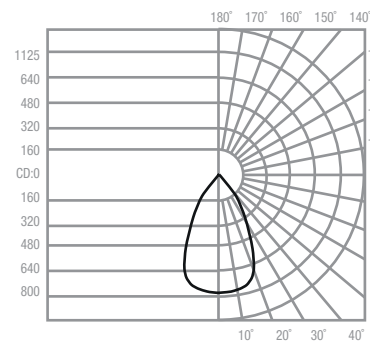

## Product Installation

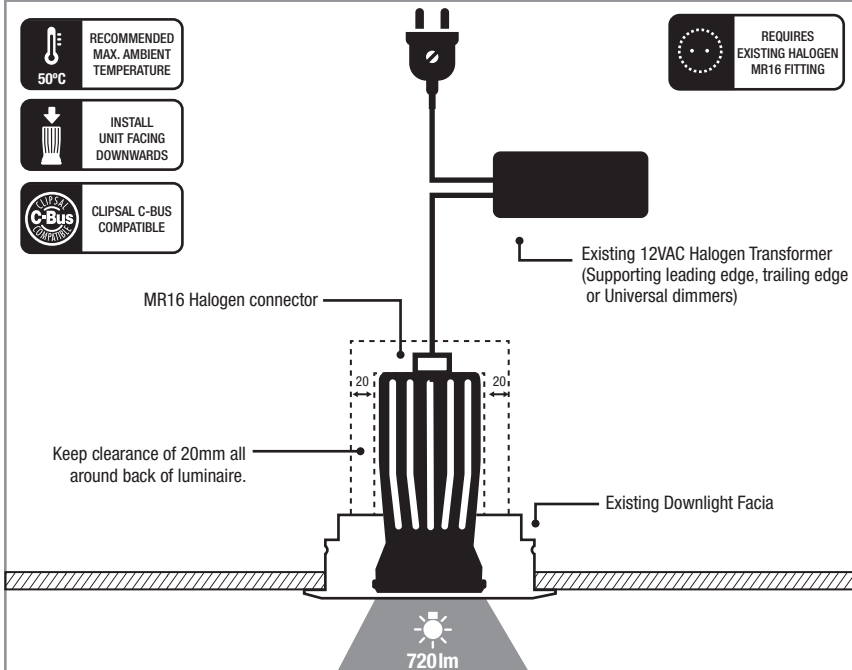

## Specifications

Physical		Electrical	
Fascia Colour	White or Silver	Input Voltage	12VAC
Weight	165g	Dimming Range	0-100%
Install Clearance	20mm	Power Factor	up to 0.95
Warranty	3 years	IP Rating	IP40
STC Rating	42	Surge Protection	3100V
Luminaire Class	IEC 62560		
Material	Pure Aluminium/ UV Stabilized PMMA		
Operational		Compatibility	
Total Lumen Output	720lm	Standard Electronic and Magnetic 12V Transformers	
Light Quality	CRI 83+	Leading Edge Dimmers	
Efficacy	70lm/W	Trailing Edge Dimmers	
Beam Angle	60°	Universal Dimmers	
Color Temp.	3000K		
Operating Temp.	-30°C to 100°C		
Average Temp.	54°C (@Ta25)		
Ambient Temp.	-28°C to 68°C		
Lifetime	70,000hrs (@Ta35)		